

# Distributor Series

- 1. Distributor Series, Standard Push Lock.....P97
- 2. Distributor Series, Stamping Contact Screw.....P98



# Distributor SERIES

## CHOGORI

### Distribution Systems Specifications

#### Distributor Series


##### Description

Push Lock Type, Standard

##### Figure



##### Drawing

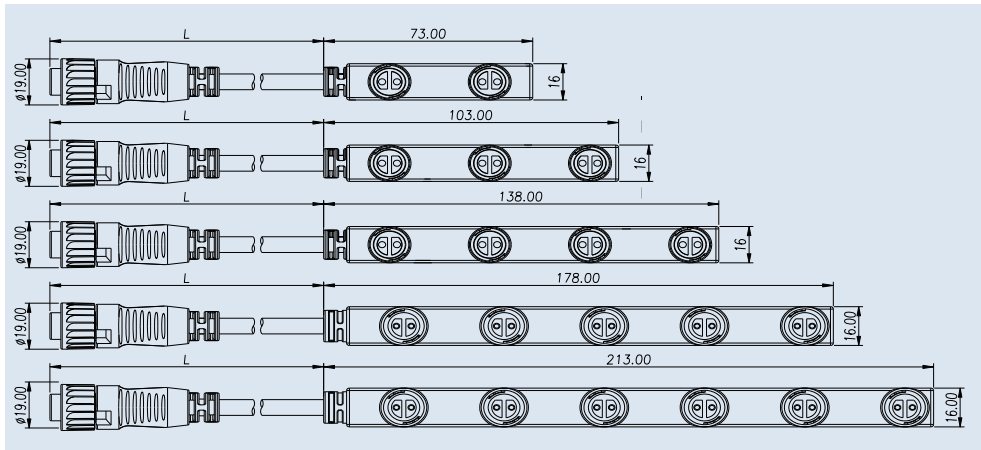

##### Part Number

Contacts	Ways	Connection Type	Part Number	Contacts	Ways	Connection Type	Part Number
2	2	In Series	44002030-01-XXX	2	2	In Parallel	44002030-11-XXX
	3		44002030-02-XXX		3		44002030-12-XXX
	4		44002030-03-XXX		4		44002030-13-XXX
	5		44002030-04-XXX		5		44002030-14-XXX
	6		44002030-05-XXX		6		44002030-15-XXX

##### Specifications

Number of Contacts	2
Wire Gauge	1.0mm <sup>2</sup> (17AWG)
Cable Range	3.5mm - 8.5 mm
Environmental Protection	IP67
Mechanical Life	500 mating cycles
Operating Temperature	- 45°C - 105°C
Voltage Rating	300V
Rated Current (40°C)	10A
Contact	Brass, Ni Plated
Material of Housing	PA

# Distributor SERIES

## CHOGORI

### Distribution Systems Specifications

#### Distributor Series


##### Description

Screw Type, Stamping Contact

##### Figure



##### Drawing

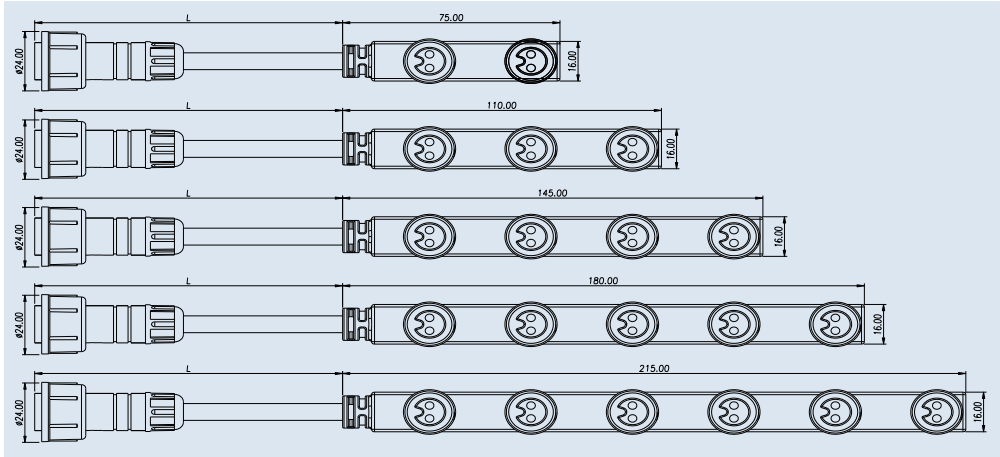

##### Part Number

Contacts	Ways	Connection Type	Part Number	Contacts	Ways	Connection Type	Part Number
2	2	In Series	45002010-01-XXX	2	2	In Parallel	45002010-11-XXX
	3		45002010-02-XXX		3		45002010-12-XXX
	4		45002010-03-XXX		4		45002010-13-XXX
	5		45002010-04-XXX		5		45002010-14-XXX
	6		45002010-05-XXX		6		45002010-15-XXX

##### Specifications

Number of Contacts	2
Wire Gauge	1.5mm <sup>2</sup> (16AWG)
Cable Range	3.5mm - 8.5 mm
Environmental Protection	IP67
Mechanical Life	100 mating cycles
Operating Temperature	- 45°C - 105°C
Voltage Rating	300V
Rated Current (40°C)	10A
Contact	Brass, Ni Plated
Material of Housing	PA